MONOBLOC PORTABLE AIR CONDITIONERS MUPO-C15/H15 SERIES

With outlet pipe to the outside and remote control



Wi-Fi Connection

Control the air conditioning equipment from anywhere.



Ventilation function It allows operation only with ventilation.



Remote control

Wireless remote control included.



Air discharge tube to the outside

Easy and quick to install, it allows the use of the air conditioner immediately.




Dehumidification

Moisture reduction restoring an optimum temperature in wet areas.




Condensate removal

Removes condensate water so it is not necessary to connect the air conditioner to a drain. In dehumidification mode and in very humid environments, it is recommended to connect the equipment to a drain.

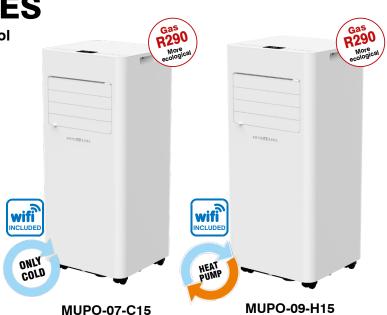

Window kit included



TECHNICAL SPECIFICATIONS:

Model			MUP0-07-C15	MUP0-09-H15
Code			CL20108	CL20109
EAN Code			8432953084035	8432953084042
Cooling	Nominal capacity	kW	2,051	2,637
		frig/h	1.764	2.268
	Nominal consumption PEER	kW	0,78	1,005
	EERd	W/W	2,63	2,63
	Energy Efficiency Class		А	A
	Electricity consumption QSD	kWh/60 min	0,778	1,003
Heating	Nominal capacity	kW	-	2,05
		Kcal/h	-	1.763
	Nominal consumption PCOP	kW	-	0,835
	COPd	W/W	-	2,46
	Energy Efficiency Class		-	A
	Electricity consumption QSD	kWh/60 min	-	0,831
Power consumption in thermostat-off mode PTO		W	-	-
Standby power consumption PSB		W	2	2
Sound power level LWA		dB (A)	65	65
Power Supply		V-Hz-Ph	220-240V~50Hz, 1N	
Max. current		A	3,5	4,5
Air flow rate	Indoor (High / Medium / Low)	m³/h	300 / - / 280	340 / - / 320
	Outdoor	m³/h	300	340
Air discharge pipe (Diameter / Max. length) mm		mm	150 / 1500	
Refrigerant	Type / GWP		R290 / 3	
	Quantity	kg / TCO ₂ eq	0,115 / 0,0	0,18 / 0,0
Dimensions (W x D x H)		mm	303 x 296,5 x 693	303 x 296,5 x 693
Weight		kg	19,5	22

Warning: 1. The design and specifications are subject to change without prior notice for product improvement.

2. The sound level values correspond to values obtained in an anechoic chamber.

